



PIAGGIO PIAGGIO 1 PIAGGIO 1+ **PIAGGIO 1 ACTIVE** Innovative design with 3D texture • Bright, original colours • LED front and rear lights • Large under-seat compartment for a jet helmet Keyless system Electric motor • Digital colour instrument panel Moped 45 km/h • Scooter 60 km/h • Piaggio MIA system, standard on Piaggio 1+ and Piaggio 1 Active *Only available on Piaggio 1+ and Piaggio 1 Active









PIAGGIO MP3 530 EXCLUSIVE



- Euro 5+ 530 hpe engine
- ABS/ASR system with combined braking
- Storage compartment with USB port
- Under-seat compartment that can hold 2 full-face helmets
- Full LED lighting
- 7" colour TFT instrument panel
- Stand-free parking system
- Keyless start-up system
- Cruise Control
- 3 driving mode maps (eco/sport/comfort)
- Remote control for seat opening with bike finder
- Reverse with rear camera
- Radar system with BLIS and LCDAS functions
- Piaggio MIA connectivity system as standard






PIAGGIO LIBERTY 50 PIAGGIO LIBERTY 125 PIAGGIO LIBERTY 150

- Instrument panel with LCD colour display
- ABS only on the front wheel on 125 and 150 cc
- Air-cooled i-get engines with electronic injection and 3 valves on all sizes
- Spacious under-seat compartment
- LED front and rear lights
- New aluminium luggage rack that can hold a top box
- Front compartment for storing small items
- Low, easily accessible seat and pull-out passenger footrests for greater comfort

PIAGGIO LIBERTY 50 S PIAGGIO LIBERTY 125 S PIAGGIO LIBERTY 150 S



- Glossy black finish
- Dark rims
- Blue details on rims and front steering cover





PIAGGIO MEDLEY 125 PIAGGIO MEDLEY 200



- i-get 125 and 200 engines with Start&Stop system
- ABS/ASR system
- Headlight and full LED DRL
- · Multifunction LCD digital instrument cluster
- Ergonomic seat
- Dynamic design
- Storage compartment with USB port
- Spacious under-seat compartment that can hold 2 demi jet helmets
- Classic, sophisticated colours combined with matt bronze finish

PIAGGIO MEDLEY 125 S PIAGGIO MEDLEY 200 S



- Front and rear brake disc with wavy profile and gold-coloured callipers
- Piaggio MIA connectivity system as standard
- Sporty matt colours with metallic black rims

PIAGGIO BEVERLY 310 PIAGGIO BEVERLY 400



- · Modern, dynamic design
- 310 hpe and 400 hpe with ABS/ASR system
- Suspension compartment for greater stability and comfort
- Keyless system
- Full LED lighting
- · Fully digital instrument cluster
- Spacious under-seat compartment that can hold 1 modular helmet and other items. Storage compartment with built-in USB port
- Top fairing as standard on 400 hpe
- Piaggio MIA connectivity system as standard on 400 hpe
- Smart, sophisticated style: range of glossy colours, black seat with double material and double tone-on-tone stitching
- Metallic finishes and light grey wheel rims

PIAGGIO BEVERLY 310 S PIAGGIO BEVERLY 400 S



- Sporty style with black seat with double material and double contrast stitching
- Graphite-effect finishes and dark grey wheel rims





	Piaggio 1	Piaggio 1+	Piaggio 1 Active
Engine	Electric hub motor	Electric hub motor	Electric hub motor
Battery	1,4 kWh	2,3 kWh	2,0 kWh
Voltage	48 V	48 V	48 V
Capacity	29 Ah	48 Ah	42 Ah
Power	2,0 kW (2,2 kW peak)	2,2 kW (3,0 kW peak)	2,7 kW (3,0 kW peak)
Max Speed	45 km/h	45 km/h	60 km/h
Torque	125 Nm	125 Nm	95 Nm
Cooling	Air	Air	Air
Starter	Keyless	Keyless	Keyless
Chassis	Single cradle structure of steel tubes and stamped sheet metal	Single cradle structure of steel tubes and stamped sheet metal	Single cradle structure of steel tubes and stamped sheet metal
Front suspension	Single-sided suspension (single shock absorber)	Single-sided suspension (single shock absorber)	Single-sided suspension (single shock absorber)
Rear suspension	Double hydraulic shock absorber	Double hydraulic shock absorber	Double hydraulic shock absorber
Front brake	Disc Ø 175 mm	Disc Ø 175 mm	Disc Ø 175 mm (Combined Braking System front and rear, CBS)
Rear brake	Disc Ø 175 mm	Disc Ø 175 mm	Disc Ø 175 mm (Combined Braking System front and rear, CBS)
Front tyre	Tubeless 100/80 - 10"	Tubeless 100/80 - 10"	Tubeless 100/80 - 10"
Rear tyre	Tubeless 100/80 - 10"	Tubeless 100/80 - 10"	Tubeless 100/80 - 10"
Seat height	770 mm	770 mm	770 mm
Range ECO	55 km*	90 km*	80 km*
Length / Width / Height to Wheelbase	1.680 mm / 750 mm / 1.220 mm	1.680 mm / 750 mm / 1.220 mm	1.680 mm / 750 mm / 1.220 mm
Weight (without battery)	75 kg	75 kg	79 kg
Battery weight	10 kg	15 kg	15 kg
Emissions compliance	Euro 5	Euro 5	Euro 5

^{*}The measured data are based on road test at constant speed ("wide open throttle") and can be affected by different conditions such as load, temperature, wind speed, road surface and operating habits. Battery capacity may decay up to 20% due to different factors such as number of recharging cycles and battery usage.

	Piaggio MP3 310 hpe Piaggio MP3 310 hpe Sport	Piaggio MP3 400 hpe Piaggio Sport	Piaggio MP3 530 hpe Exclusive
Engine	Single-Cylinder, four-stroke hpe	Single-Cylinder, four-stroke hpe	Single-Cylinder, four-stroke hpe
Engine capacity	310 cc	399 cc	530 cc
Bore x Stroke	75 mm x 70,1 mm	84 mm x 72 mm	97,5 mm x 71 mm
Max Power	19,4 kW (26,4 CV) @ 7.500 rpm	26,4 kW (35,8 CV) @ 7.500 rpm	33,0 kW (44,8 CV) @ 7.250 rpm
Max Torque	27,3 Nm @ 6.000 rpm	37,7 Nm @ 5.700 rpm	51,0 Nm @ 5.250 rpm
Valve train	Single overhead cam shaft (SOHC), 4 valves	Single overhead cam shaft (SOHC), 4 valves	Single overhead cam shaft (SOHC), 4 valves
Fuel system	Electronic injection	Electronic injection	Electronic injection
Cooling system	Liquid	Liquid	Liquid
Front suspension	Double wheels with oscillating arms	Double wheels with oscillating arms	Double wheels with oscillating arms
Rear suspension	Coil springs and shock absorbers	Coil springs and shock absorbers	Coil springs and shock absorbers
Braking system	ABS with combined braking system at the pedal - ASR	ABS - CBS with ASR	ABS - CBS with ASR
Front brake	Dual 258 mm discs	Dual 258 mm discs	Dual 258 mm discs
Rear break	Single 240 mm disc	Single 240 mm disc	Single 240 mm disc
Tires	Front 110/70-13" (x2) Rear 140/60-14"	Front 110/70-13" (x2) Rear 140/70-14"	Front 110/70-13" (x2) Rear 140/70-14"
Length / Width / Height to Wheelbase	2.035 mm / 800 mm / 1.455 mm	2.160 mm / 815 mm / 1.580 mm	2.160 mm / 815 mm / 1.550 mm
Fuel tank capacity	11 liters	13,7 liters	13,7 liters
Reported fuel consumption	3,1 liters per 100km	3,9 liters per 100km	4,1 liters per 100km
Reported CO ₂ emissions	73 g/km	90 g/km	95 g/km
Gross vehicle weight	230 kg	260 kg	280 kg
Emissions class	Euro 5+	Euro 5+	Euro 5+

MP3 can also be ridden with a car driver's licence, in accordance with European directive 2006/126/CE, as long as the rider is at least 21 years of age, is riding in his/her home country and respects any additional national legislation. Ask your local dealer about the specific requirements in your country.

	Piaggio Liberty 50 i-get Piaggio Liberty 50 S i-get	Piaggio Liberty 125 i-get Piaggio Liberty 125 S i-get	Piaggio Liberty 150 i-get Piaggio Liberty 150 S i-get
Engine	Single cylinder 4-stroke i-get	Single cylinder 4-stroke i-get	Single cylinder 4-stroke i-get
Engine capacity	49 cc	124 cc	155 cc
Bore x Stroke	39 mm x 41,4 mm	52 mm x 58,6 mm	58 mm x 58,6 mm
Max Power	2,2 kW (3,0 CV) @ 7.500 rpm	8,1 kW (10,9 CV) @ 7.750 rpm	9,5 kW (12,9 CV) @ 7.750 rpm
Max Torque	3,0 Nm @ 6.500 rpm	11,0 Nm @ 6.250 rpm	13,0 Nm @ 6.750 rpm
Consumption (WMTC cycle)	2,5 I/100 km	2,5 l/100 km	2,7 I/100 km
CO ₂ emissions	57 g/km	58 g/km	63 g/km
Valve train	Single overhead camshaft, 3 valves (2 intake, 1 exhaust)	Single overhead camshaft, 3 valves (2 intake, 1 exhaust)	Single overhead camshaft, 3 valves (2 intake, 1 exhaust)
Fuel system	Electronic injection	Electronic injection	Electronic injection
Cooling	Air	Air	Air
Starter	Electric	Electric	Electric
Transmission	Automatic CVT	Automatic CVT	Automatic CVT
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Frame	High resistance tubular steel	High resistance tubular steel	High resistance tubular steel
Front suspension	Telescopic hydraulic fork	Telescopic hydraulic fork	Telescopic hydraulic fork
Rear suspension	Single hydraulic shock absorber with 5-position preload adjustment	Single hydraulic shock absorber with 5-position preload adjustment	Single hydraulic shock absorber with 5-position preload adjustment
Front / Rear brake	Disc Ø 240 mm / Drum Ø 140 mm	Disc Ø 240 mm / Drum Ø 140 mm	Disc Ø 240 mm / Drum Ø 140 mm
ABS	-	ABS at the front wheel only	ABS at the front wheel only
Front tyre	Tubeless 90 / 80 - 16"	Tubeless 90 / 80 - 16"	Tubeless 90 / 80 - 16"
Rear tyre	Tubeless 100 / 80 - 14"	Tubeless 100 / 80 - 14"	Tubeless 100 / 80 - 14"
Length / Width / Height to Wheelbase	1.945 mm / 700 mm / 1.370 mm 780 mm	1.945 mm / 690 mm / 1.350 mm 790 mm	1.945 mm / 690 mm / 1.350 mm 790 mm
Fuel tank capacity	6 liters	6 liters	6 liters
Emissions class	Euro 5	Euro 5+	Euro 5+

	Piaggio Medley 125 i-get Piaggio Medley 125 S i-get	Piaggio Medley 200 i-get Piaggio Medley 200 S i-get
Engine	Single cylinder 4-stroke i-get	Single cylinder 4-stroke i-get
Engine capacity	125 cc	174 cc
Bore x Stroke	52 mm x 58,7 mm	61,5 mm x 58,77 mm
Max. Power	11 kW (14,9 CV) @ 8.900 rpm	13 kW (17,7 CV) @ 8.650 rpm
Max. Torque	12 Nm @ 6.750 rpm	16,5 Nm @ 7.000 rpm
Consumption (WMTC cycle)	42 km/l	41 km/l
CO ₂ emissions	59 g/km	61 g/km
Valve train	Single overhead camshaft (SOHC) - 4 valves	Single overhead camshaft (SOHC) - 4 valves
Fuel System	Electronic injection	Electronic injection
Cooling	Liquid	Liquid
Starter	Start & Stop system	Start & Stop system
Transmission	Automatic CVT	Automatic CVT
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Frame	Single cradle tubular steel structure with pressed steel reinforcements	Single cradle tubular steel structure with pressed steel reinforcements
Front suspension	Hydraulic telescopic fork	Hydraulic telescopic fork
Rear suspension	Coil springs and shock absorbers	Coil springs and shock absorbers
Front / Rear brake	Disc Ø 260 mm / Disc Ø 240 mm	Disc Ø 260 mm / Disc Ø 240 mm
ABS	ABS/ASR	ABS/ASR
Front / Rear tyre	Tubeless 100/80 - 16" / Tubeless 120/70 - 14"	Tubeless 100/80 - 16" / Tubeless 120/70 - 14"
Length / Width / Height to Wheelbase	2.020 mm / 705 mm / 1.395 mm	2.020 mm / 705 mm / 1.395 mm
Saddle height	799 mm	799 mm
Fuel tank capacity	7 liters	7 liters
Emissions class	Euro 5+	Euro 5+

	Piaggio Beverly 310 hpe Piaggio Beverly 310 S hpe	Piaggio Beverly 400 hpe Piaggio Beverly 400 S hpe
Engine	Single cylinder 4-stroke, 4 valves	Single cylinder 4-stroke, 4 valves
Engine capacity	310 cc	399 cc
Bore x Stroke	75 mm x 70,1 mm	84 mm x 72 mm
Max Power	20,4 kW @ 7.500 rpm	26,4 kW @ 7.500 rpm
Max Torque	29,5 Nm @ 6.000 rpm	37,7 Nm @ 5.700 rpm
Consumption (WMTC cycle)	n.d.	n.d.
CO ₂ emissions	n.d.	n.d.
Valve train	Single overhead camshaft (SOHC) - 4 valves	Single overhead camshaft (SOHC) - 4 valves
Fuel system	Electronic injection	Electronic injection
Cooling	Liquid	Liquid
Starter	Electric	Electric
Transmission	Automatic CVT	Automatic CVT
Clutch	Automatic centrifugal dry clutch	Oil bath automatic centrifugal multiplate clutch
Frame	Double cradle tubular pipe in high strength steel	Double cradle tubular pipe in high strength steel
Front suspension	Hydraulic telescopic fork	Hydraulic telescopic fork
Rear suspension	Dual, double action hydraulic shock absorber, adjustable preload	Dual, double action hydraulic shock absorber, adjustable preload
Front brake	Disc Ø 300 mm	Disc Ø 300 mm
Rear brake	Disc Ø 240 mm	Disc Ø 240 mm
Braking system	ABS/ASR	ABS/ASR
Front tyre	Tubeless 110/70 - 16"	Tubeless 120/70 - 16"
Rear tyre	Tubeless 140/70 - 14"	Tubeless 150/70 - 14"
Length / Width / Height to Wheelbase	2.125 mm / 800 mm / 1.540 mm	2.155 mm / 800 mm / 1.550 mm
Fuel tank capacity	12 liters	12 liters
Emissions class	Euro 5+	Euro 5+

SERVICES




Thanks to the X-Care + Maintenance services the brand offers, you can drive your Piaggio scooter without a care in the world. When you select and purchase one of the packages available to meet various needs, you will be entitled to periodic scheduled maintenance in line with the specifications set out in the use and maintenance manual. The services described can be activated on the models with engine capacity of 50 cc or above. Check with your trusted dealer which packages are available on the various models.



The X-Care + Extended Warranty completes the dedicated services on offer, protecting your peace of mind when it comes to your Piaggio scooter and allowing you to travel worry-free. In addition to 2-year factory warranty, you can enjoy further protection with a 1 or 2 year extended warranty which includes roadside assistance.

- Coverage of repair costs for faults due to manufacturing or assembly defects on parts
- Replacement of any damaged parts with original spare parts, labour included
- Roadside Assistance includes breakdown and towing service to the nearest Piaggio Service point
- Specialised, certified Piaggio Group Service assistance
- Maintenance of the retail value of your used vehicle in case you decide to sell
- Coverage throughout Europe

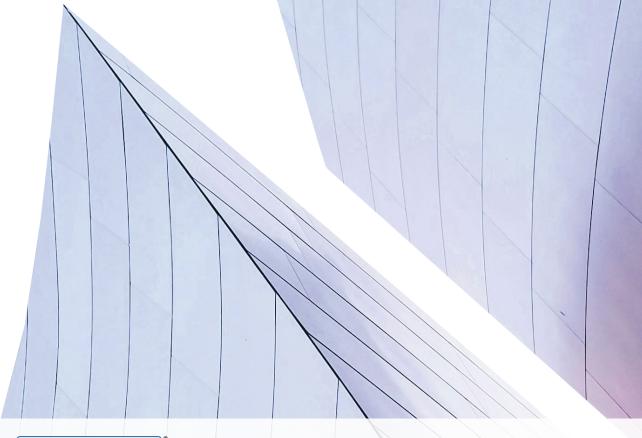



With DreamRide, your dream of riding a Piaggio scooter is even easier to achieve. In fact, you can choose the most suitable financing solution for you, selecting it from a range of services conceived by the Piaggio Group to meet the numerous and changing financing needs.

The company reserves the right to make technical and aesthetic changes at any time. Full information on models and accessories is available at www.piaggio.com. Ride carefully, always wearing a helmet and suitable gear. Always comply with the rules of the road and respect the environment. Read the operating and maintenance manual carefully. Always ask for original and approved spare parts in accordance with current legislation. Visit an Official Pigagio Deglership or Authorised Retailer for a secure purchase and augranteed service support.

MANAGEMENT SYSTEM

DNV-CERTIFIED ACEMENT SYSTEM

DNV-CERTIFIED SAFETY MANAGEMENT SYSTEM -



2 YEARS

800-818298

Piaggio is a registered trademark of Piaggio & C. S.p.A.

The services described can be activated on the models with engine capacity of 50 cc or above. Check with your trusted dealer which packages are available on the various models.

